

# Welded Tube Pros LLC Mill Alignment Report

Office Tel #  
330-658-7070  
Dale Knapp Cell #  
330-417-1635

**Welded Tube Pros LLC**  
16574 Old Chippewa Trail  
Doylestown, Ohio 44123  
**"The end to end alignment service"**

Office eFax #  
312-896-5696  
Bud Graham Cell #  
330-289-3415


Sheet 1 of 2

Customer Name	Steel Tube Company	
Street Address	123 Steel Street	
City, State, Zip Code	Anywhere	
Contact Name		
Contact Phone / Fax Numbers		Fax #
Mill Name / #	Mill #2	
Date of Service	02 XXX 02	Service
Purchase Order #	ABCDEF	

Alignment Notes, machine conditions:

Copyright 2002, Welded Tube Pros LLC, all rights reserved.

Welded Tube Pros Service Provider:

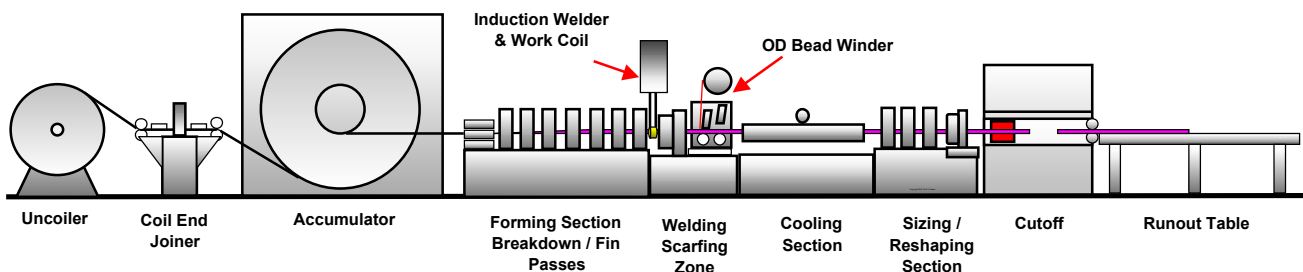

# Welded Tube Pros LLC Mill Alignment Report

Customer Name **Steel Tube Company**  
 Mill Name / # **Mill #2**

Date of Service **02 XXX 02**  
 Purchase Order # **ABCDEF**

## Breakdown Passes, Shaft Shoulder Alignment


Sheet 2 of 2

Copyright 2002, Welded Tube Pros LLC, all rights reserved.

Thickness of current Spacer (as measured during the mill inspection prior to alignment check with the laser position indicator)

Top Shaft Spacer	0.438	0.438	0.438	
Bottom Shaft Spacer	0.448	0.448	0.448	

Dimensions in the "red" circles are the required spacer thickness to provide perfect shoulder alignment. "Change" shows an spacer that requires work. "OK" shows spacers that do not require work.

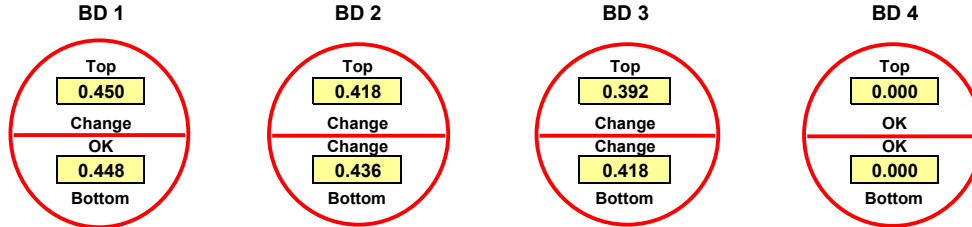

Laser Measurement of "Shoulder" or outer "Face" of Spacer Position


	Initial	Final		Initial	Final		Initial	Final		Initial	Final	
Top Shaft	(0.012)	0.004	OK	0.020	0.005	OK	0.046	(0.012)	Change			OK
Bottom Shaft	0.000	0.000	OK	0.012	0.012	Change	0.030	(0.005)	OK			OK

Minimum Strip Thickness **0.125**  
 Shoulder permissible offset % **5%** Percentage Permissible offset inches **0.0063**

## Fin Passes, Shaft Shoulder Alignment

Thickness of current Spacer

Top Shaft Spacer	0.438	0.438	0.438	0.438
Bottom Shaft Spacer	0.448	0.448	0.448	0.448

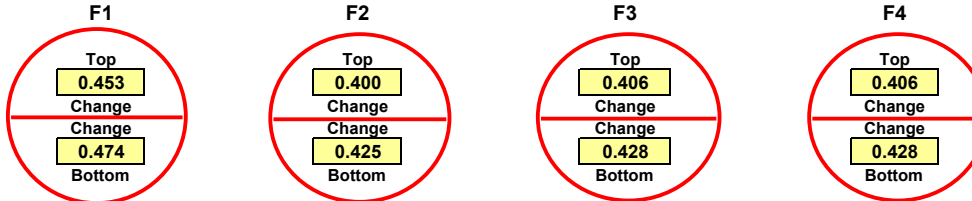


Laser Measurement of "Shoulder" or outer "Face" of Spacer Position

	Initial	Final		Initial	Final		Initial	Final		Initial	Final	
Top Shaft	(0.015)	0.001	OK	0.038	(0.001)	OK	0.032	(0.002)	OK	0.032	(0.002)	OK
Bottom Shaft	(0.026)	0.000	OK	0.023	0.006	OK	0.020	0.002	OK	0.020	0.002	OK

## Sizing Passes, Shaft Shoulder Alignment

Thickness of current Spacer

Top Shaft Spacer	0.438	0.438	0.438	
Bottom Shaft Spacer	0.448	0.448	0.448	

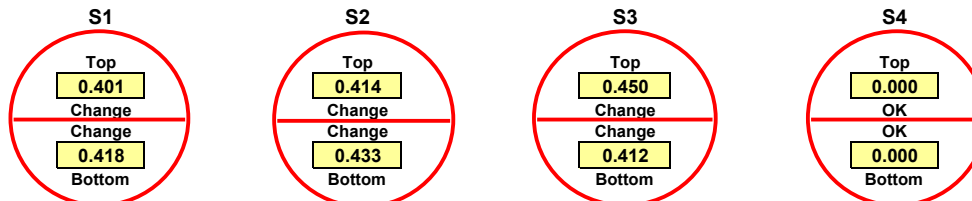

Laser Measurement of "Shoulder" or outer "Face" of Spacer Position

	Initial	Final		Initial	Final		Initial	Final		Initial	Final	
Top Shaft	0.037	(0.006)	OK	0.024	(0.004)	OK	(0.012)	(0.012)	Change			OK
Bottom Shaft	0.030	0.000	OK	0.015	0.000	OK	0.036	0.000	OK			OK

## **This worksheet is an sample alignment report.**

The "green" cells are input cells filled in as the inspection progresses from rollpass to rollpass. The "yellow" cell are calculated numbers generated by the input measurements.

The inspector must decide the allowable offset permitted by the mill and tooling arrangement. Here the permissible offset is set to 5% of the minimum strip thickness or a maximum out of alignment of + / - 0.0063"

Initial readings are collected after the laser is "bucked" into alignment with the reference planes.

After the initial reading are collected the report generates a list of suggesting new master spacer thickness to return the mill shoulder location to an "aligned" reference plane. All locations showing the symbol "Change" require new master spacers. Locations showing the symbol "OK" do not require any additional work.

After the new master spacers are installed an second set of measurements is collected to confirm that the new master spacers have corrected the problem. If the second measurement confirms the alignment within the desired tolerance the "OK" symbol will be displayed. If the measurement shows a shoulder out of alignment greater that that permitted by the preset accuracy the symbol will still show "Change". Passes BD2 Bottom, BD3 Top and S3 Top are example where additional work is required to complete the shoulder alignment process.  
When all cell show "OK" the alignment is complete.